



Highdecks

37-265-1060

The profile 37-265-1060 is a profiled steel sheet used for flat roofs. Thanks to its large span, it is an excellent profile for the roofs of industrial or tertiary buildings. This steel deck sheet is available in various sizes and can be coated on the B-side with an interior coating. Custom versions are also available upon request.

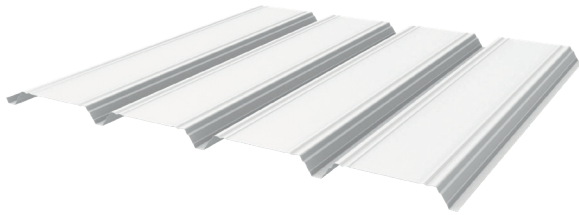

Product	Thickness (mm)	Weight (kg/m ²)
345	0,75	6,89
345	0,88	8,08
345	1,00	9,18

Technical characteristics

Standard length	from 500 to 13500 mm
Effective width	1060 mm
Type of metal	Steel S320 GD
Coatings	Interiorcoating 912 (15 µ), Galva according to color chart MR101_Colorflow

References

Galvanized steel	EN 10346:2015 - tolerances according to EN 10143:2006
Pre-painted steel	EN 10169:2022
Dimensions / Tolerances	EN 508-1:2021 (Geometry)
Static calculation	EN 1993-1-3:2006

Load tables (in kN/m²)

Static Properties

tN [mm]	Weight (kg/m ²)	Top flange in compression						Bottom flange in compression					
		Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I _{eff} [cm ⁴ /m]	Vw,Rk [kN/m]	Rw,Rk.B [kN/m]	Rw,Rk. A [kN/m]	Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I _{eff} [cm ⁴ /m]	Vw,Rk [kN/m]	Rw,Rk. A [kN/m]	
0,75	6,89	1,58	1,42	12,07	43,75	23,60	10,23	1,42	1,58	12,91	43,75	43,75	
0,88	8,08	1,96	1,68	14,31	51,75	32,37	14,09	1,68	1,96	15,27	51,75	51,75	
1,00	9,18	2,33	1,92	16,38	59,13	41,50	18,12	1,92	2,33	17,44	59,13	59,13	



Permissible downward load (kN/m²) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,00	3,20	3,40	3,60	3,80
Single L/200	0,75	8,43	5,63	3,55	2,38	1,67	1,22									
	0,88	10,43	6,68	4,21	2,82	1,98	1,44	1,08								
	1,00	12,45	7,64	4,81	3,22	2,26	1,65	1,24								
Double L/200	0,75	8,43	5,86	4,30	3,29	2,60	2,11	1,74	1,46	1,25						
	0,88	10,43	7,24	5,32	4,07	3,22	2,61	2,15	1,81	1,54	1,27					
	1,00	12,45	8,65	6,35	4,86	3,84	3,11	2,57	2,16	1,81	1,45	1,18				
Multi L/200	0,75	8,43	5,86	4,42	3,50	2,84	2,30	1,73	1,33	1,05						
	0,88	10,43	7,24	5,49	4,33	3,46	2,73	2,05	1,58	1,24						
	1,00	12,45	8,65	6,49	5,01	3,96	3,12	2,35	1,81	1,42	1,14					

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.
 minimum support widths: 40 mm for end supports - 60 mm for intermediate supports.
 The load tables are limited by a maintenance load of 1,00 kN/m² or 1,50 kN/m.



Permissible upward load (kN/m²) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		1,00	1,20	1,40	1,60	1,80	2,00	2,20	2,40	2,60	2,80	3,00	3,20	3,40	3,60	3,80
Single L/150	0,75	7,59	5,27	3,87	2,96	2,34	1,73	1,30	1,00	0,79	0,63	0,51	0,42	0,35	0,30	0,25
	0,88	8,97	6,23	4,58	3,51	2,77	2,05	1,54	1,19	0,93	0,75	0,61	0,50	0,42	0,35	0,30
	1,00	10,25	7,12	5,23	4,01	3,16	2,34	1,76	1,36	1,07	0,85	0,69	0,57	0,48	0,40	0,34
Double L/150	0,75	8,43	5,86	4,30	3,29	2,60	2,11	1,74	1,46	1,25	1,08	0,94	0,82	0,73	0,65	0,58
	0,88	10,43	7,24	5,32	4,07	3,22	2,61	2,15	1,81	1,54	1,33	1,16	1,02	0,90	0,80	0,72
	1,00	12,45	8,65	6,35	4,86	3,84	3,11	2,57	2,16	1,84	1,59	1,38	1,22	1,08	0,96	0,82
Multi L/150	0,75	10,54	7,32	5,38	4,12	3,25	2,64	2,18	1,83	1,49	1,20	0,97	0,80	0,67	0,56	0,48
	0,88	13,04	9,05	6,65	5,09	4,02	3,26	2,69	2,25	1,77	1,41	1,15	0,95	0,79	0,67	0,57
	1,00	15,56	10,81	7,94	6,08	4,80	3,89	3,22	2,57	2,02	1,62	1,31	1,08	0,90	0,76	0,65

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.
 Minimum support widths: 40 mm for end supports - 60 mm for intermediate supports