

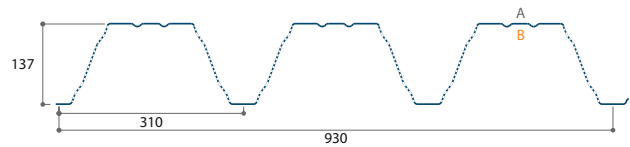


## Highdecks

# 137-310-930 PERFO

The high-profile 137-310-930 Perfo is a profiled and perforated steel sheet for flat roof constructions. This steel deck sheet offers a large span and excellent stability, making it an ideal choice for industrial and tertiary applications. The 137-310-930 Perfo is available in various dimensions and can be coated on the B-side with an interior coating. Other versions are available upon request.

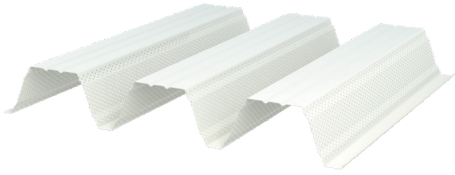

Product	Thickness (mm)	Weight (kg/m <sup>2</sup> )
3924	0,75	8,86
3924	0,88	10,40
3924	1,00	11,82
3924	1,25	14,77

## Technical characteristics

Standard length	from 1500 to 13600 mm
Effective width	930 mm
Type of metal	Steel S320 GD
Coatings	Interiorcoating 912 (15 μ) according to color chart MR101_Colorflow
Perforation rate	15% (R5T12,5 O)

## References

Galvanized steel	EN 10346:2015 - tolerances according to EN 10143:2006
Pre-painted steel	EN 10169:2022
Dimensions / Tolerances	EN 508-1:2021 (Geometry)
Static calculation	EN 1993-1-3:2006

## Load tables (in kN/m<sup>2</sup>)

## Static properties

tN [mm]	Weight (kg/m <sup>2</sup> )	Top flange in compression						Bottom flange in compression				
		Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I <sub>eff</sub> [cm <sup>4</sup> /m]	Vw,Rk [kN/m]	Rw,Rk,B [kN/m]	Rw,Rk, A [kN/m]	Mc,Rk,F [kNm/m]	Mc,Rk,B [kNm/m]	I <sub>eff</sub> [cm <sup>4</sup> /m]	Vw,Rk [kN/m]	Rw,Rk, A [kN/m]
0,75	8,86	8,89	7,43	252,35	18,24	18,20	5,34	7,43	8,89	244,99	18,24	18,24
0,88	10,40	11,27	9,69	305,31	29,16	25,27	7,49	9,69	11,27	302,86	29,16	29,16
1,00	11,82	13,58	11,93	350,92	42,39	32,61	9,75	11,93	13,58	349,38	42,39	42,39
1,25	14,77	18,54	16,21	442,26	81,27	50,30	15,27	16,21	18,54	440,32	81,27	81,27



## Permissible downward load (kN/m<sup>2</sup>) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		4,00	4,20	4,40	4,60	4,80	5,00	5,20	5,40	5,60	5,80	6,00	6,20	6,40	6,60	6,80
Single L/200	0,75	1,78	1,70	1,62	1,55	1,48	1,42	1,37	1,29	1,16	1,04					
	0,88	2,50	2,38	2,27	2,17	2,08	1,97	1,75	1,56	1,40	1,26	1,14	1,03			
	1,00	3,25	3,10	2,95	2,83	2,56	2,26	2,01	1,80	1,61	1,45	1,31	1,19	1,08		
	1,25	5,09	4,81	4,19	3,66	3,22	2,85	2,54	2,26	2,03	1,83	1,65	1,50	1,36	1,24	1,13
Double L/200	0,75	1,78	1,70	1,62	1,55	1,48	1,42	1,37	1,32	1,27	1,22	1,15	1,09	1,04		
	0,88	2,50	2,38	2,27	2,17	2,08	2,00	1,92	1,83	1,72	1,63	1,54	1,46	1,39	1,32	1,25
	1,00	3,25	3,10	2,95	2,83	2,71	2,60	2,44	2,30	2,16	2,04	1,93	1,83	1,74	1,65	1,57
	1,25	5,09	4,85	4,59	4,27	3,98	3,73	3,49	3,28	3,09	2,92	2,75	2,57	2,41	2,27	2,14
Multi L/200	0,75	1,91	1,78	1,66	1,55	1,48	1,42	1,37	1,32	1,27	1,23	1,19	1,15	1,11	1,08	1,03
	0,88	2,58	2,40	2,27	2,17	2,08	2,00	1,92	1,85	1,78	1,72	1,66	1,56	1,47	1,38	1,30
	1,00	3,26	3,10	2,95	2,83	2,71	2,60	2,50	2,41	2,31	2,15	2,01	1,88	1,77	1,66	1,57
	1,25	5,09	4,85	4,63	4,43	4,24	3,96	3,66	3,39	3,15	2,94	2,75	2,57	2,41	2,27	2,14

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.  
 minimum support widths: 40 mm for end supports - 160 mm for intermediate supports.  
 The load tables are limited by a maintenance load of 1,00 kN/m<sup>2</sup> or 1,50 kN/m.



## Permissible upward load (kN/m<sup>2</sup>) for span (m)

Number of fields	Thickness (mm)	Span (m)														
		4,00	4,20	4,40	4,60	4,80	5,00	5,20	5,40	5,60	5,80	6,00	6,20	6,40	6,60	6,80
Single L/150	0,75	2,48	2,25	2,05	1,87	1,72	1,59	1,47	1,36	1,26	1,18	1,10	1,03	0,97	0,91	0,84
	0,88	3,23	2,93	2,67	2,44	2,24	2,07	1,91	1,77	1,65	1,54	1,44	1,34	1,24	1,13	1,04
	1,00	3,98	3,61	3,29	3,01	2,76	2,55	2,35	2,18	2,03	1,89	1,74	1,58	1,43	1,31	1,19
	1,25	5,40	4,90	4,47	4,09	3,75	3,46	3,20	2,96	2,70	2,43	2,19	1,99	1,81	1,65	1,51
Double L/150	0,75	2,87	2,64	2,43	2,23	2,06	1,90	1,75	1,63	1,51	1,41	1,32	1,23	1,16	1,09	1,03
	0,88	3,76	3,41	3,10	2,84	2,61	2,40	2,22	2,06	1,92	1,79	1,67	1,56	1,47	1,38	1,30
	1,00	4,53	4,11	3,74	3,42	3,14	2,90	2,68	2,48	2,31	2,15	2,01	1,88	1,77	1,66	1,57
	1,25	6,18	5,61	5,11	4,67	4,29	3,96	3,66	3,39	3,15	2,94	2,75	2,57	2,41	2,27	2,14
Multi L/150	0,75	3,33	3,09	2,87	2,67	2,49	2,32	2,16	2,02	1,89	1,76	1,65	1,54	1,45	1,36	1,28
	0,88	4,61	4,22	3,87	3,55	3,26	3,01	2,78	2,58	2,40	2,23	2,09	1,95	1,83	1,72	1,62
	1,00	5,66	5,13	4,68	4,28	3,93	3,62	3,35	3,10	2,89	2,69	2,51	2,36	2,21	2,08	1,96
	1,25	7,73	7,01	6,38	5,84	5,36	4,94	4,57	4,24	3,94	3,67	3,43	3,22	3,02	2,84	2,67

The above load is the total load in Ultimate Limit State (UGT) divided by 1,5.  
 Minimum support widths: 40 mm for end supports - 160 mm for intermediate supports